
RGP17R

RGP12R RGP17R RGP21R RGP26R RGP40R RGP48R RGP55R

TAKE CONTROL

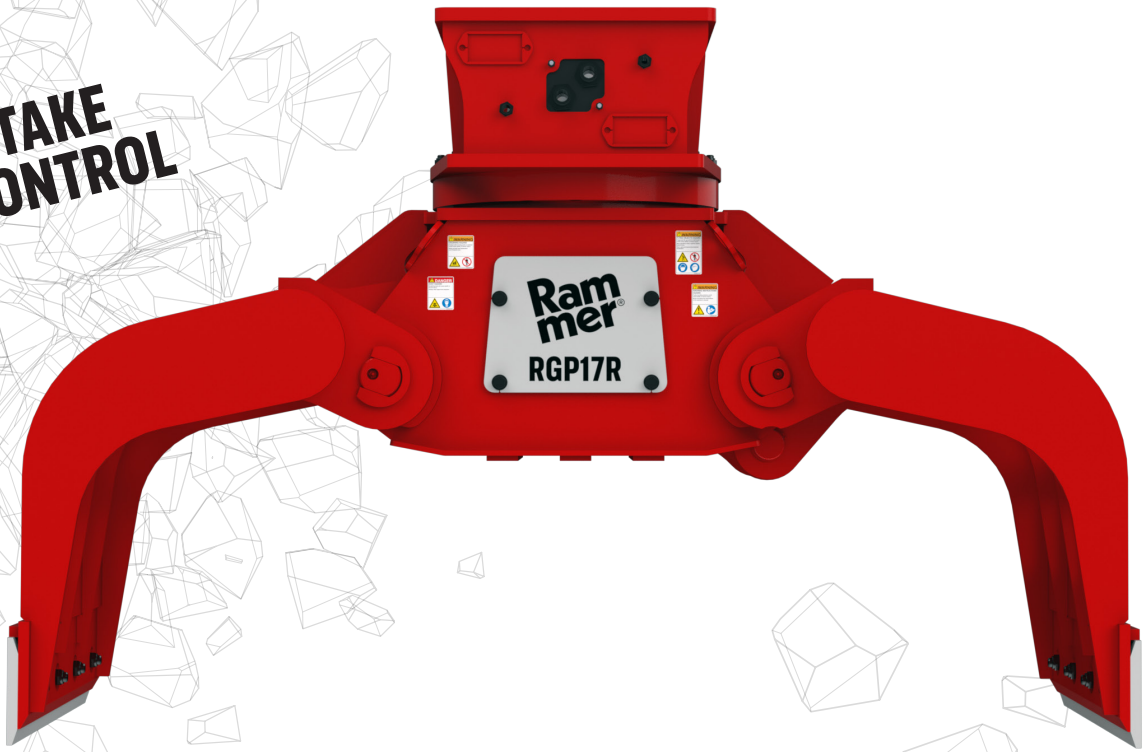


GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION


VERSATILE MATERIAL HANDLING
Handle, sort and separate demolition materials for efficient processing and recycling.


RELIABLE HYDRAULIC ROTATION
Dual hydraulic motors support reliable rotation for controlled material handling.

PROTECTED HYDRAULICS
A pressure relief valve helps protect the hydraulic system from excessive pressure.

RGP17R

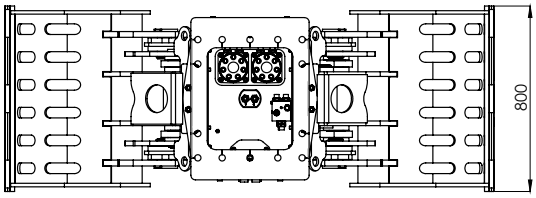

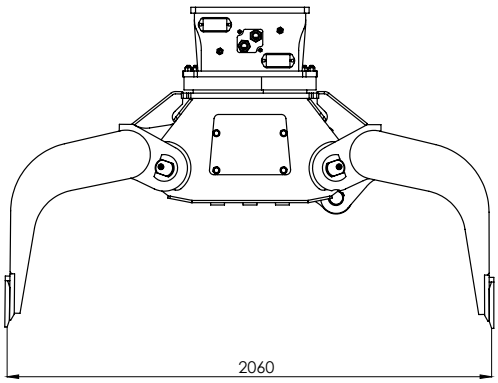

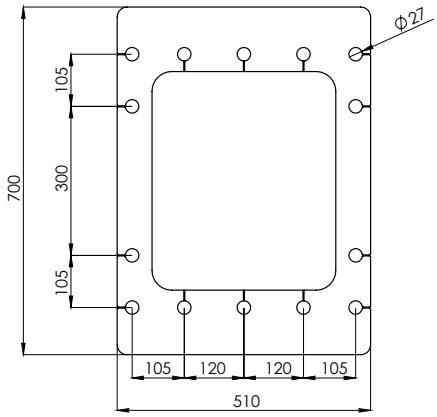

SPECIFICATIONS | RGP17R

OPENING (A)	2060 mm / 81.1 in
HEIGHT (B)	1400 mm / 55 in
WIDTH (C)	800 mm / 31.5 in
EXCAVATOR WEIGHT	14–18 ton | 30800–39600 lbs
WEIGHT	1066 kg / 2350 lbs
OIL PRESSURE	300 bar / 4351 psi
OIL CAPACITY	80–100 l/min | 21–26 gal/min
ROTATION PRESSURE	120 bar / 1740 psi
ROTATION CAPACITY	15–20 l/min | 4–5 gal/min
OPERATING TOTAL WEIGHT	1180 kg / 2600 lbs

FIND OUT MORE

Explore RGP17R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice