RGP21R

RGP12R RGP17R RGP21R RGP26R RGP40R RGP48R RGP55R

TAKE CONTROL




GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION


VERSATILE MATERIAL HANDLING
Handle, sort and separate demolition materials for efficient processing and recycling.

RELIABLE HYDRAULIC ROTATION
Dual hydraulic motors support reliable rotation for controlled material handling.

PROTECTED HYDRAULICS
A pressure relief valve helps protect the hydraulic system from excessive pressure.

RGP21R

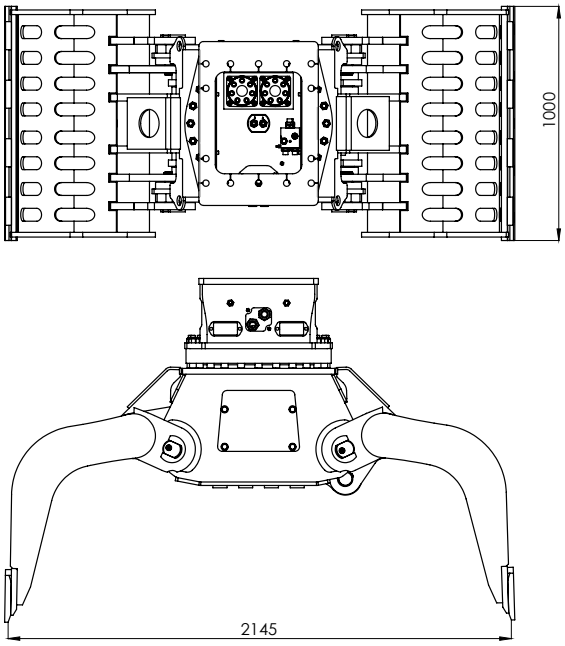

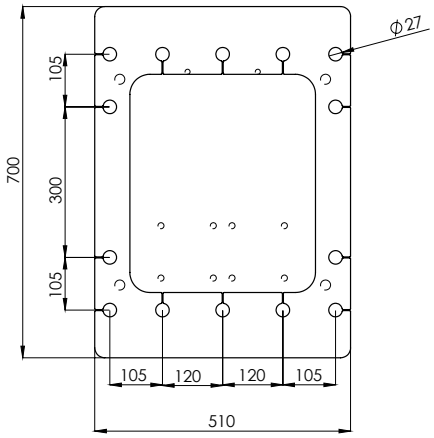

SPECIFICATIONS | RGP21R

OPENING (A)	2145 mm / 84.5 in
HEIGHT (B)	1475 mm / 58 in
WIDTH (C)	850 mm / 33.5 in
EXCAVATOR WEIGHT	18–22 ton | 39600–48500 lbs
WEIGHT	1430 kg / 3150 lbs
OIL PRESSURE	300 bar / 4351 psi
OIL CAPACITY	80–100 l/min | 21–26 gal/min
ROTATION PRESSURE	120 bar / 1740 psi
ROTATION CAPACITY	15–20 l/min | 4–5 gal/min
OPERATING TOTAL WEIGHT	1550 kg / 3417 lbs

FIND OUT MORE

Explore RGP21R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice