
RGP26R

RGP12R RGP17R RGP21R **RGP26R** RGP40R RGP48R RGP55R

TAKE CONTROL

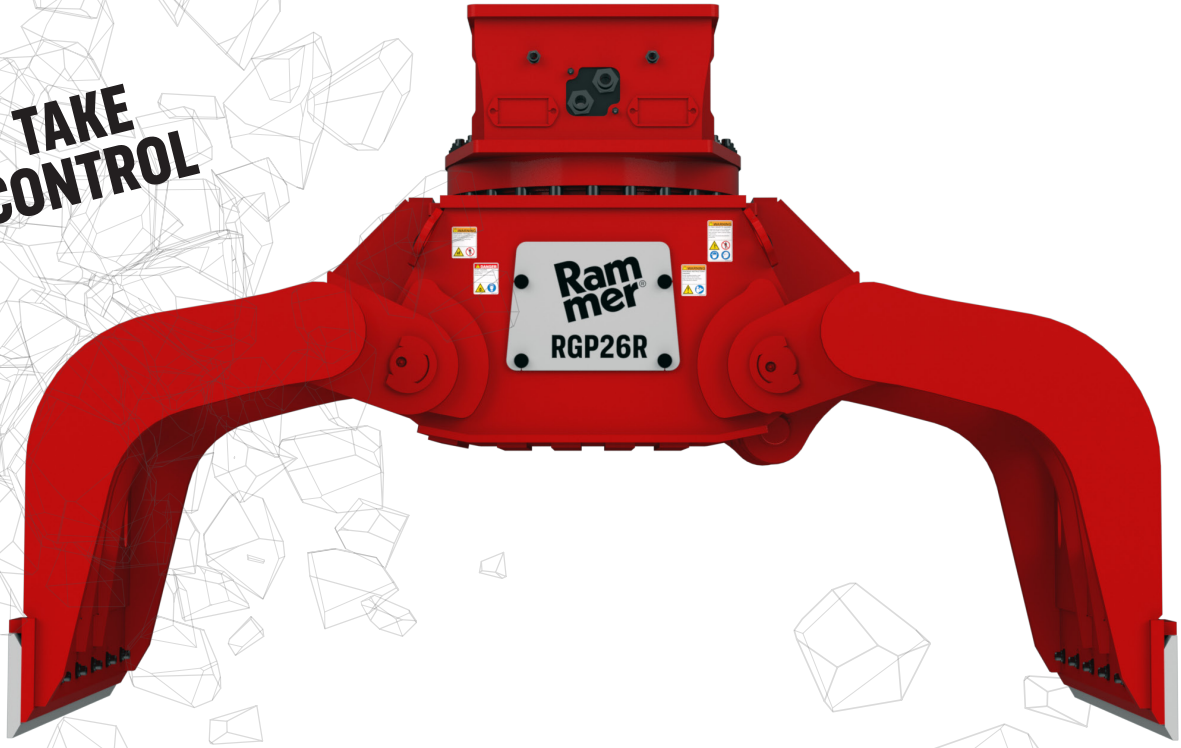


GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION


VERSATILE MATERIAL HANDLING
Handle, sort and separate demolition materials for efficient processing and recycling.

PRECISE POSITIONING
Hydraulic rotation helps position the grapple for controlled material handling.

PROTECTED HYDRAULICS
A pressure relief valve helps protect the hydraulic system from excessive pressure.

RGP26R

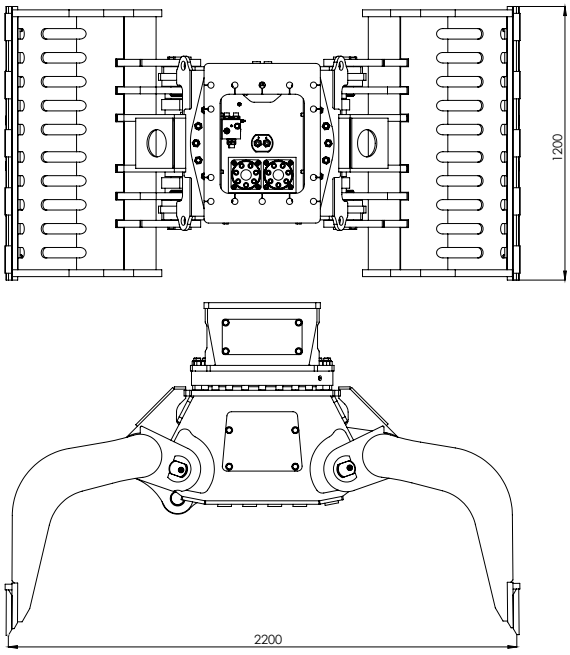

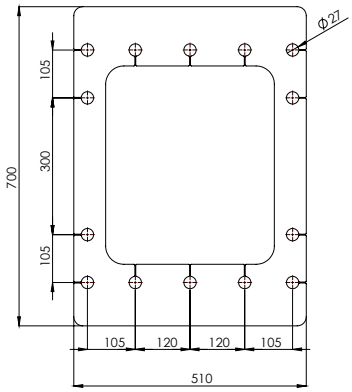

SPECIFICATIONS | RGP26R	
OPENING (A)	2200 mm / 86.6 in
HEIGHT (B)	1475 mm / 58 in
WIDTH (C)	900 mm / 35.4 in
EXCAVATOR WEIGHT	22–30 ton | 48500–66100 lbs
WEIGHT	1787 kg / 4321 lbs
OIL PRESSURE	300 bar / 4351 psi
OIL CAPACITY	80–100 l/min | 21–26 gal/min
ROTATION PRESSURE	120 bar / 1740 psi
ROTATION CAPACITY	15–20 l/min | 4–5 gal/min
OPERATING TOTAL WEIGHT	1960 kg / 3940 lbs

FIND OUT MORE

Explore RGP26R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice