
RGP40R

RGP12R RGP17R RGP21R RGP26R **RGP40R** RGP48R RGP55R

TAKE CONTROL

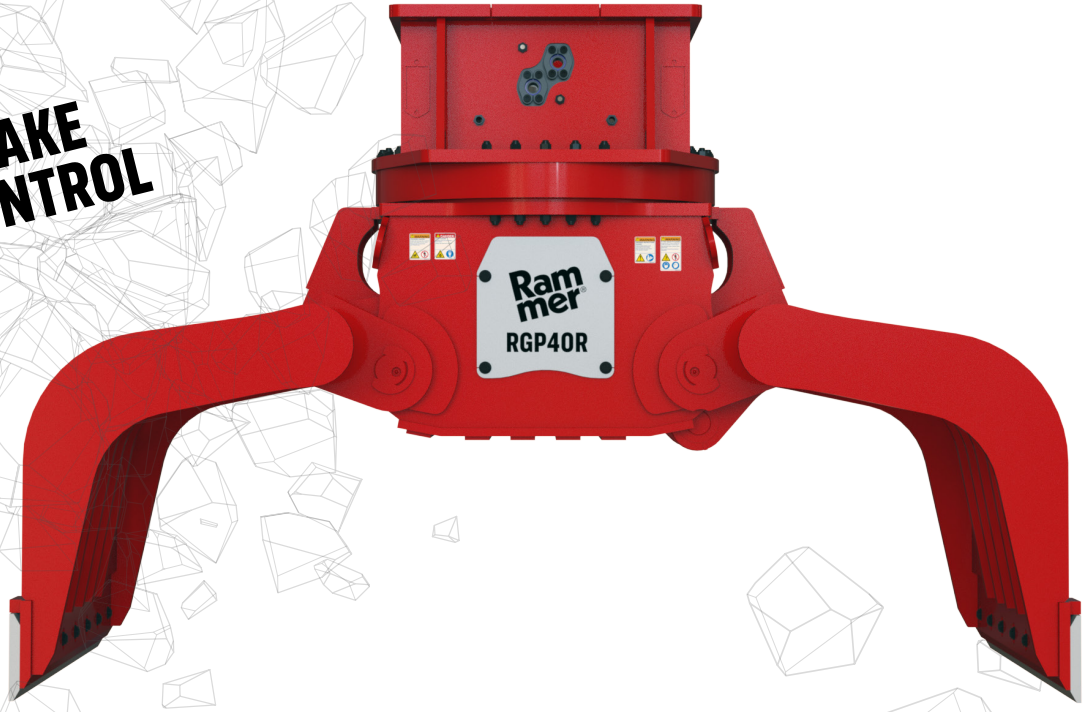


GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION


VERSATILE MATERIAL HANDLING
Handle, sort and separate demolition materials for efficient processing and recycling.

PRECISE POSITIONING
Hydraulic rotation helps position the grapple for controlled material handling.

PROTECTED HYDRAULICS
A pressure relief valve helps protect the hydraulic system from excessive pressure.

RGP40R

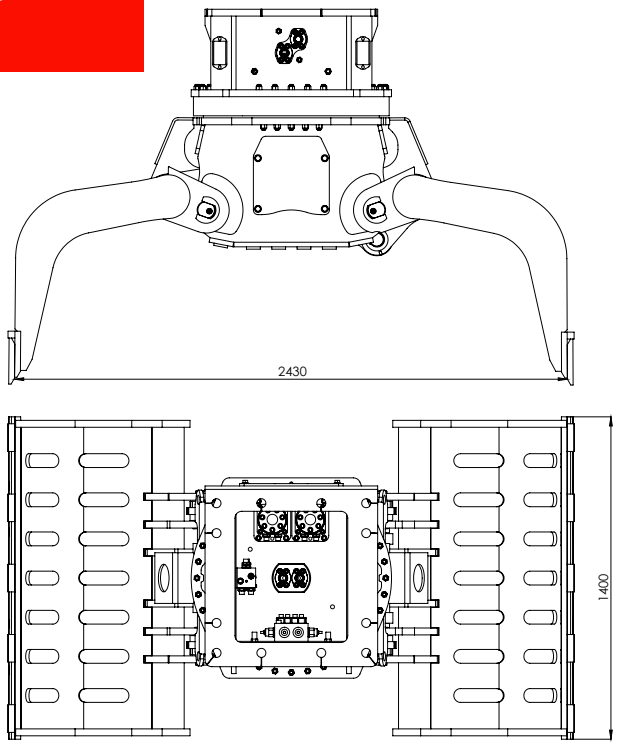

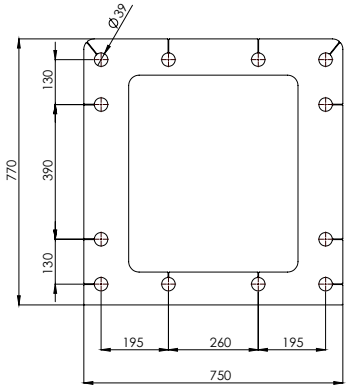

SPECIFICATIONS | RGP40R

OPENING (A)	2430 mm / 96.5 in
HEIGHT (B)	1581 mm / 62 in
WIDTH (C)	950 mm / 37.4 in
EXCAVATOR WEIGHT	30–35 ton | 66100–77100 lbs
WEIGHT	2250 kg / 4960 lbs
OIL PRESSURE	300 bar / 4351 psi
OIL CAPACITY	80–120 l/min | 21–31 gal/min
ROTATION PRESSURE	120 bar / 1740 psi
ROTATION CAPACITY	40 l/min / 10.5 gal/min
OPERATING TOTAL WEIGHT	2475 kg / 5456 lbs

FIND OUT MORE

Explore RGP40R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice