
RGP55R

RGP12R RGP17R RGP21R RGP26R RGP40R RGP48R RGP55R

TAKE CONTROL

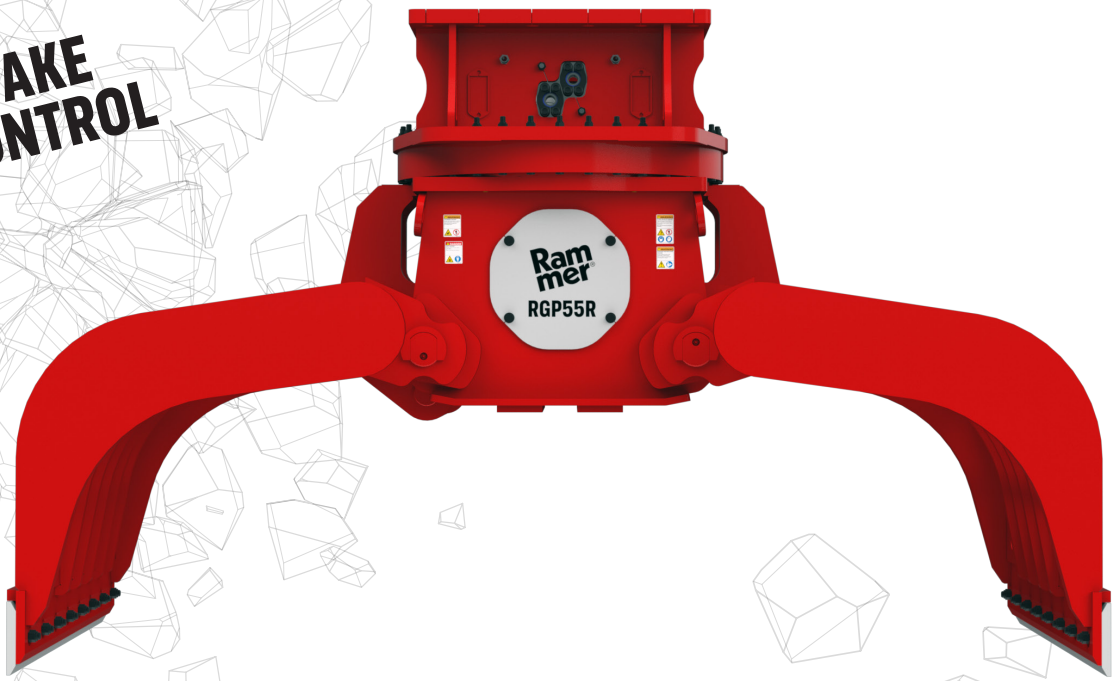


GROUND-LEVEL SECONDARY PROCESSING AND MATERIAL SEPARATION


VERSATILE MATERIAL HANDLING
Handle, sort and separate demolition materials for efficient processing and recycling.

PRECISE POSITIONING
Hydraulic rotation helps position the grapple for controlled material handling.

PROTECTED HYDRAULICS
A pressure relief valve helps protect the hydraulic system from excessive pressure.

RGP55R

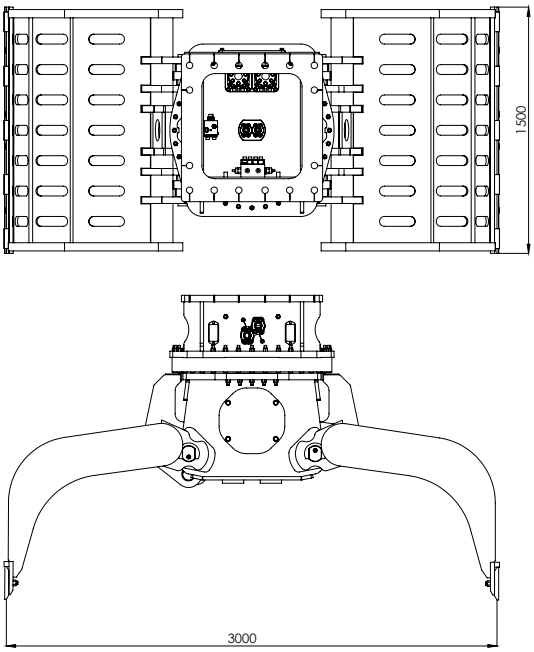

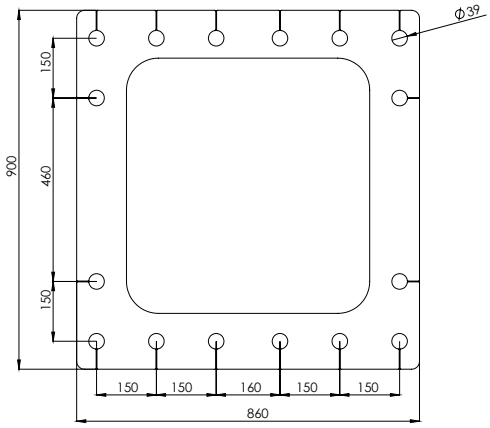

SPECIFICATIONS | RGP55R

OPENING (A)	3000 mm / 118 in
HEIGHT (B)	1860 mm / 73 in
WIDTH (C)	1050 mm / 41.3 in
EXCAVATOR WEIGHT	45–65 ton | 99200–143300 lbs
WEIGHT	3740 kg / 8245 lbs
OIL PRESSURE	300 bar / 4351 psi
OIL CAPACITY	120–140 l/min | 31–37 gal/min
ROTATION PRESSURE	120 bar / 1740 psi
ROTATION CAPACITY	40 l/min / 10.5 gal/min
OPERATING TOTAL WEIGHT	4100 kg / 9040 lbs

FIND OUT MORE

Explore RGP55R
Explore specifications, applications and product features.

VIEW PRODUCT DETAILS

Specifications are subject to change without notice